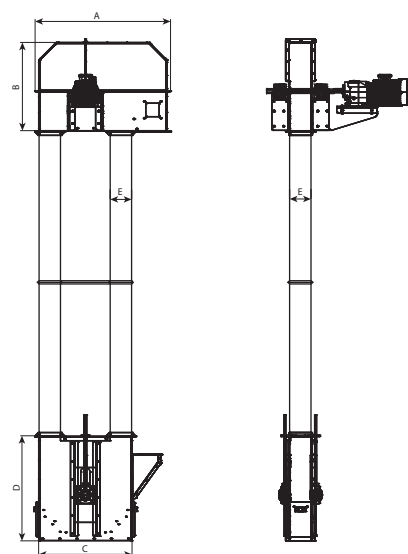



TAŞIMA
HANDLING
ТРАНСПОРТИРОВКА


ELEVATÖR
Elevator
Элеватор


Type	Technical Features	Dimensions (mm)				Weight (kg)
	Motor (kW)	A	B	E	H	
ECO-EL 16x16	0,75	785	700	570	160	164
ECO-EL 20x20	1,1	1100	830	750	200	245
ECO-EL 22x22	1,5	1116	830	790	220	293
ECO-EL 25x25	3	1220	855	950	250	428
ECO-EL 30x30	4	1520	1075	1120	300	757
ECO-EL 30x35	5,5	1520	1075	1120	350	870

ECO-EL-101 Elevatör Kovaları (Metal)


Elevator Buckets (Sheet)
Ковш Нории (Металлический)

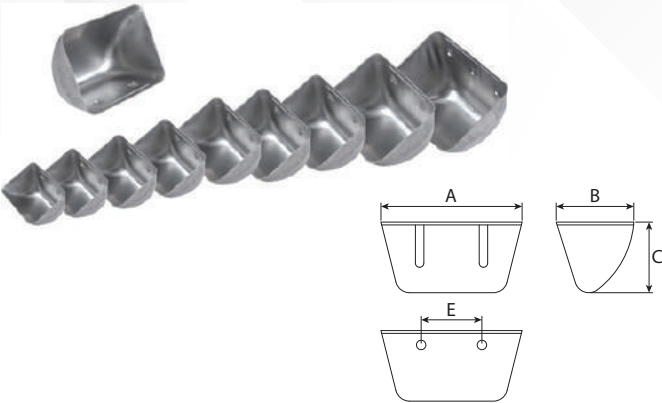

Code	Type	Dimensions (mm)					
		A	B	C	E	Lt.	Kg.
ECO-EL -101	90	98	95	71	46	0,310	0,250
	100	110	103	77	57	0,370	0,325
	120	126	114	87	67	0,585	0,510
	140	148	133	96	85	0,820	0,750
	160	170	143	103	101	1,140	1,035
	180	188	148	110	110	1,270	1,240
	200	209	160	136	130	1,730	1,550
	225	235	166	133	140	2,345	2,315
	240	240	175	130	120	2,505	2,252
	250	260	168	137	154	2,755	2,590
	280	280	180	115	190	2,950	2,770
	300	310	180	136	205	3,890	3,680
	320	320	220	150	200	6,251	4,474

ECO-EL-102 Elevatör Kovaları (Plastik)

Elevator Buckets (Plastic)
Ковш Нории (Пластмассовый)

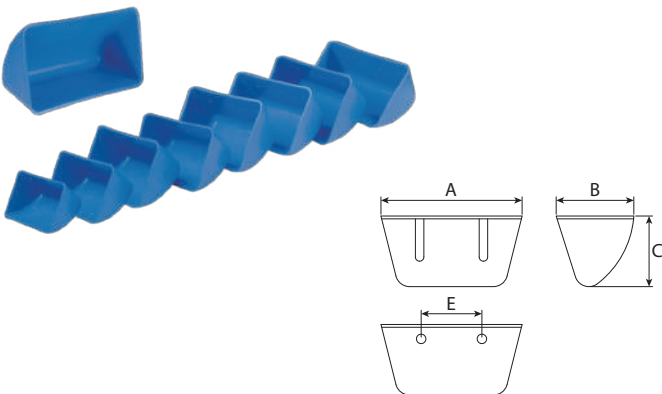

Code	Type	Dimensions (mm)					
		A	B	C	E	Lt.	Kg.
ECO-EL -102	100	107	100	75	46	0,242	0,330
	120	125	115	85	57	0,382	0,510
	140	145	135	95	85	0,581	0,750
	160	165	145	105	101	0,775	1,040
	180	185	145	110	110	1,006	1,250
	200	205	160	120	130	1,588	1,550
	225	230	165	130	140	2,101	2,320
	250	260	168	135	154	2,505	2,600
	280	295	195	140	190	3,455	2,800
	300	315	200	150	205	4,221	3,700
	320	340	212	160	215	5,022	4,250

ECO-EL-103 Elevatör Kasnağı

Elevator Pulley
Шкив Нории



Code	Diameter (mm)
ECO-EL -103	250 / 150
	300 / 140
	300 / 160
	320 / 190
	400 / 220
	400 / 240
	500 / 260
	500 / 360
	600 / 280
	630 / 440
	700 / 360

ECO-EL-104 Elevatör Kayışları (Kauçuk)

Elevator Belts (Rubber)
Лента Нории (Каучуковая)



Code	Width (mm)	Layer									
		2	3	4	5	6	7	8	9	10	
ECO-EL-104	40	-	X	X	X						
	50	-	X	X	X						
	60	-	X	X	X						
	70	-	X	X	X						
	80	-	X	X	X						
	90	-	X	X	X						
	100	-	-	X	X	X					
	110	-	-	X	X	X					
	125	-	-	X	X	X					
	140	-	-	X	X	X	-	X			
	160	-	-	X	X	X	-	X			
	180	-	-	X	X	X	X	X			
	200	-	-	X	X	X	X	X			
	220	-	-	-	X	X	X	X			
	250-280	-	-	-	X	X	X	X			
	310	-	-	-	-	X	X	X			
	350	-	-	-	X	X	X	X			
400-450	-	-	X	-	X	-	X	X	X		
500-600	-	-	X	-	X	X	X	X	X		

ECO-EL-105 Elevatör Kayışları (Kauçuk)


Elevator Belts (Rubber)
Лента Нории (Каучуковая)



Code	Width (mm)	Layer				
		2	3	4	5	6
ECO-EL-105	160	-	-	X	X	X
	180	-	-	X	X	X
	200	-	-	X	X	X
	220	-	-	-	X	X
	250-280	-	-	-	X	X
	310	-	-	-	-	X
	350	-	-	-	X	X
	400-450	-	X	X	-	X
	500-600	-	X	X	-	-

ECO-EL-106 Kayış Zımba

Belt Punch
Дырокол Ленты Нории



Code	Type	ØD (mm)	L (mm)	Weight (kg)	Volume (m³)
ECO-EL-106	3	3	105	35	10
	4	4	105	40	10
	5	5	110	50	10
	6	6	110	60	10
	7	7	115	75	10
	8	8	115	90	10
	9	9	120	100	10
	10	10	120	110	10
	11	11	125	130	5
	12	12	125	165	5
	13	13	130	165	5
	14	14	130	180	5
	15	15	135	245	5
	16	16	135	300	5

Code	Type	ØD (mm)	L (mm)	Weight (kg)	Volume (m³)
ECO-EL-106	17	17	140	365	5
	18	18	140	380	5
	19	19	145	405	5
	20	20	145	450	5
	21	21	150	250	5
	22	22	150	260	5
	23	23	160	305	5
	24	24	160	320	5
	25	25	170	365	5
	26	26	170	365	5
	27	27	180	415	5
	28	28	180	420	5
	29	29	190	465	5

ECO-EL-107 SN Yataklı Rulmanlar

SN Bearing With Housing
Подшипник С Корпусом тип SN



Code	Type
ECO-EL-107	30 SN 507
	35 SN 508
	40 SN 509
	45 SN 510
	50 SN 511
	55 SN 512

Code	Type
ECO-EL-107	60 SN 513
	65 SN 515
	70 SN 516
	75 SN 517
	80 SN 518
	100 SN 522

ECO-EL-108 Elevator Kasnakları

Elevator Pulley
Шкив подъема



Code	Type	Bearin No			
		UCF	UCFL	UCT	UCP
ECO-EL-108	204	x	x	x	x
	205	x	x	x	x
	206	x	x	x	x
	207	x	x	x	x
	208	x	x	x	x
	209	x	x	x	x
	210	x	x	x	x
	211	x	x	x	x
	212	x	x	x	x
	213	x	x	x	x
	214	x	x	x	x
	215	x	x	x	x
	216	x	x	x	x
	217	x	x	x	x
	218	x	x	x	x

ECO-EL-109 Elevatör Koko Civata

Elevator Flat Headed Bolts
Крепление Ковша Норпи



Code	Type
ECO-EL-109	M8 x 30
	M8 x 40
	M10 x 30
	M10 x 40


ECO-EL-110 Kayış Macunu

Belt Paste
Паста Для Ремня (Смазка)






VİDALI HELEZON
Screw Conveyor
Шнек

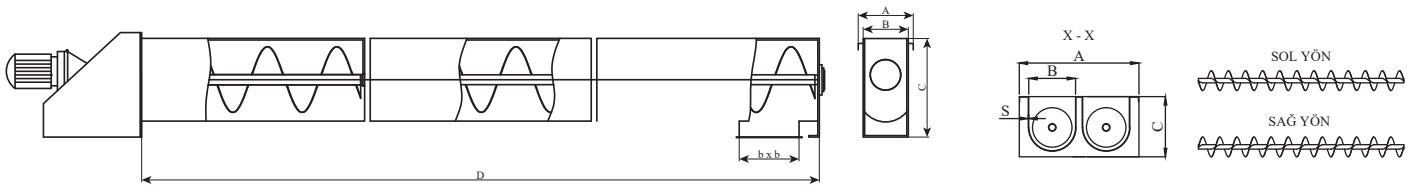

Type	Technical Features			Dimensions (mm)							Weight (kg)
	Capacity (t/h)			A	B	C	D	S	Q	H	
	Wheat	Flour	Bran								
ECO-HLZ 165	4-7	3-4	1,6-2	275	195	265	42	2	165	165	24
ECO-HLZ 180	6-9	4-6,5	1,8-3	290	210	280	42	2	180	180	26
ECO-HLZ 200	8-13	5,5-9,5	2,5-4	310	230	300	48	2	200	200	28
ECO-HLZ 220	9-15	6-10,5	3-5	330	250	320	48	2	220	220	35
ECO-HLZ 250	15-25	11-18	5-8	360	280	350	60	2	250	250	45
ECO-HLZ 270	16-27	12-20	6-9	380	300	370	60	2	270	270	48
ECO-HLZ 300	25-45	18-25	8-16	410	330	400	76	2,5	300	300	50
ECO-HLZ 350	65-70	45-50	25-30	460	380	450	90	2,5	350	350	56

TÜP HELEZON
Tube Screw Conveyor
Трубовидный Шнек


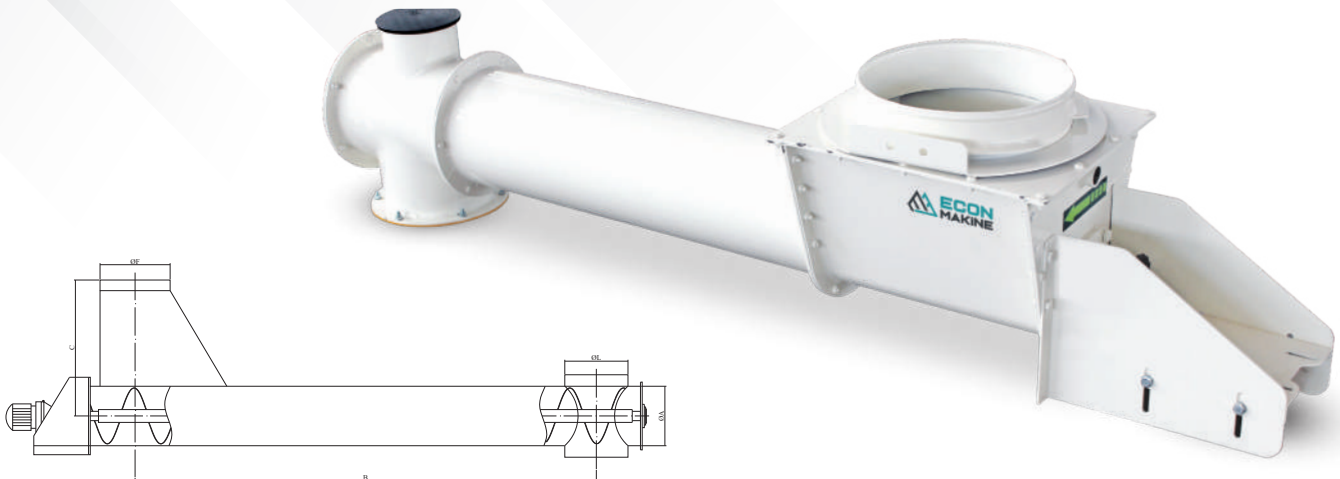


Type	Technical Features				Dimensions (mm)				Weight (kg)
	Dia Of Screw (mm)	Max. Length (m)	Capacity (t/h)		A	B	C	D	
			Flour	Bran					
ECO-TH 100	100	10	5	3	100	160	127	200	37
ECO-TH 145	145	10	6	4	145	200	168	215	40
ECO-TH 180	180	10	7	5	180	250	219	280	45
ECO-TH 220	220	10	15	10	220	305	276	270	52
ECO-TH 270	270	10	20	13	270	350	323	320	57

UN - KEPEK VİDASI
Flour - Bran Screw Conveyor
Мучной-Отрубной Шнек



Type	Technical Features			Dimensions (mm)							Weight (kg)
	Capacity (t/h)			A	B	C	D	S	Q	H	
	Wheat	Flour	Bran								
ECO-UHLZ 165	4-7	3-4	1,6-2	450	190	265	42	2	165	165	48
ECO-UHLZ 180	6-9	4-6,5	1,8-3	490	210	280	42	2	180	180	52
ECO-UHLZ 200	8-13	5,5-9,5	2,5-4	530	230	300	48	2	200	200	56
ECO-UHLZ 220	9-15	6-10,5	3-5	570	250	320	48	2	220	220	70
ECO-UHLZ 250	15-25	11-18	5-8	630	280	350	60	2	250	250	90
ECO-UHLZ 270	16-27	12-20	6-9	670	300	370	60	2	270	270	96
ECO-UHLZ 300	25-45	18-25	8-16	730	330	400	76	2,5	300	300	104
ECO-UHLZ 350	65-70	45-50	25-30	830	380	450	90	2,5	350	350	112

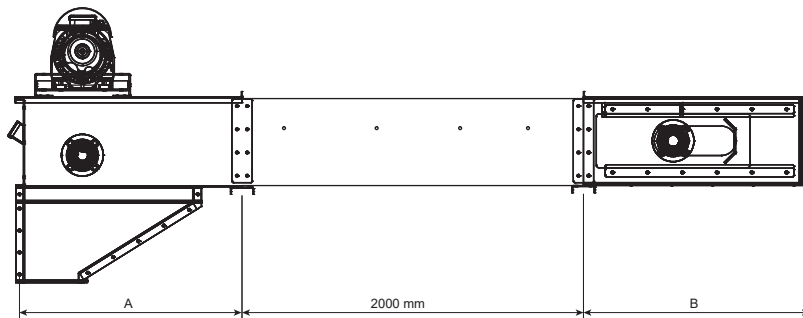

ZİNCİRLİ KONVEYÖR
Chain Conveyor
Цепной Конвейер


Type	Technical Features		Dimensions (mm)								
	Capacity (t/h)		A	B	C	E	F	G	H	J	K
	Wheat	Corn									
ECO-ZK 50	50	40	510	290	800	256		180	735	840	1200
ECO-ZK 100	100	85	510	690	800	306	430	230	860	840	1300
ECO-ZK 150	150	125	510	690	800	381	430	305	890	840	1350
ECO-ZK 200	200	170	510	690	800	416	430	340	925	840	1400
ECO-ZK 250	250	210	510	690	800	506	430	450	1050	840	1540
GZK 300	300	255	510	690	800	506	510	450	1050	840	1500

ECO-HLZ - 101 Helezon Yapağı

FlightSheet

Перо Шнека, Цельный, Холодный Прокат



Code	ØA (mm)	ØB (mm)	L (mm)	Code	ØA (mm)	ØB (mm)	L (mm)
ECO-HLZ-101-01	80	27	80	ECO-HLZ-101-12	165	42	165
ECO-HLZ-101-02	100	27	100	ECO-HLZ-101-13	180	42	180
ECO-HLZ-101-03	100	34	100	ECO-HLZ-101-14	200	49	200
ECO-HLZ-101-04	125	27	125	ECO-HLZ-101-15	200	60	200
ECO-HLZ-101-05	125	37	125	ECO-HLZ-101-16	220	49	220
ECO-HLZ-101-06	130	27	130	ECO-HLZ-101-17	250	60	250
ECO-HLZ-101-07	130	34	130	ECO-HLZ-101-18	270	60	270
ECO-HLZ-101-08	145	34	145	ECO-HLZ-101-19	300	76	300
ECO-HLZ-101-09	145	42	145	ECO-HLZ-101-20	325	76	325
ECO-HLZ-101-10	145	49	145	ECO-HLZ-101-21	350	90	350
ECO-HLZ-101-11	150	34	150	ECO-HLZ-101-22	380	102	380

ECO-HLZ - 102 Helezon Askı Yatak (Ayaklı)

Screw Hanger Housing

Подвеска Шнека (Ножка)



Code	Diameter Ø (mm)
ECO-HLZ-102-01	40
ECO-HLZ-102-02	50
ECO-HLZ-102-03	60

ECO-HLZ - 103 Helezon Askı Yatak (Ayarlı Model)

Screw Hanger Housing (Adjust Model)

Подвеска Шнека (Регулирующая)



Code	Diameter Ø (mm)
ECO-HLZ-103-01	40
ECO-HLZ-103-02	50
ECO-HLZ-103-03	60

ECO-HLZ - 105 Helezon Askı Yatak (Gijonlu Model)

Screw Hanger Housing (Connector Model)

Подвеска Шнека (Разъемная)



Code	Diameter Ø (mm)
ECO-HLZ-104-01	40
ECO-HLZ-104-02	50
ECO-HLZ-104-03	60





ECO-HLZ - 105 Asma Yatak Burcu

Hanger Bearing Wedge

Прокладка Подвески Шнека



Code	Diameter Ø (mm)
ECO-HLZ-105-01	40
ECO-HLZ-105-02	50
ECO-HLZ-105-03	60

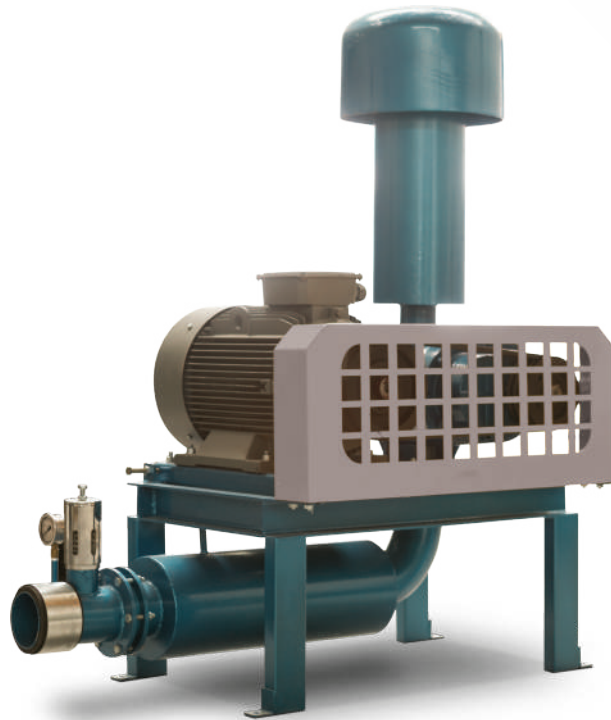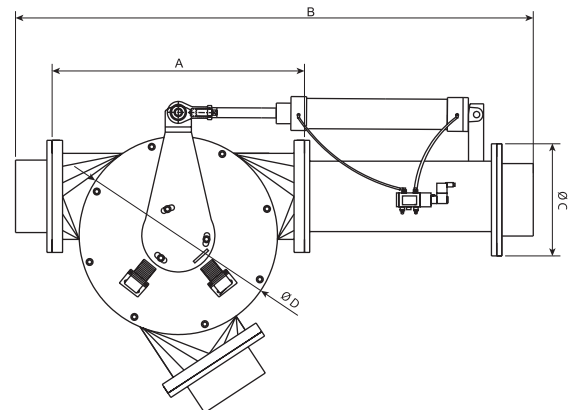
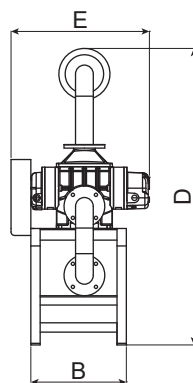
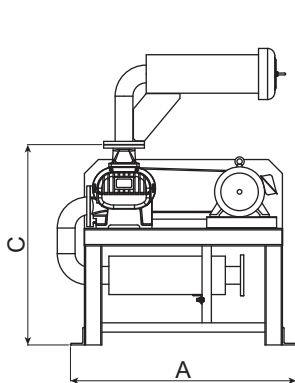

BLOWER POMPA
Blower Pump
БLOWER Насос

PNÖMATİK YÖN KLAPESİ
Pneumatic Direction Clamp
Пневматический Направляющий Клапан


Type	Technical Features			Dimensions (mm)			
	Valve	Air Pressure (Bar)	Piston	A	B	ØC	ØD
ECO-PYK 50	5/2-24VDV/220-240v	6	32x115 mm	250	640	100	180
ECO-PYK 70	5/2-24VDV/220-240v	6	40x150 mm	310	690	130	225
ECO-PYK 95	5/2-24VDV/220-240v	6	50x180 mm	400	900	165	285
ECO-PYK 125	5/2-24VDV/220-240v	6	50x210 mm	485	985	195	370
ECO-PYK 135	5/2-24VDV/220-240v	6	50x260 mm	485	995	215	380
ECO-PYK 160	5/2-24VDV/220-240v	6	50x280 mm	530	1040	233	430

BLOWER HAVA KİLİDİ

Blower Air Lock

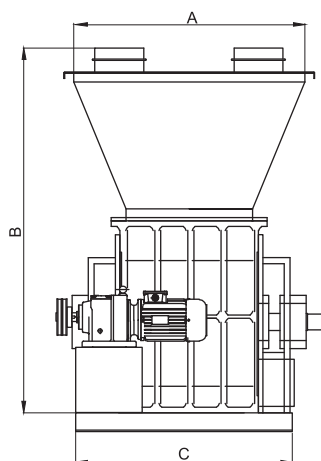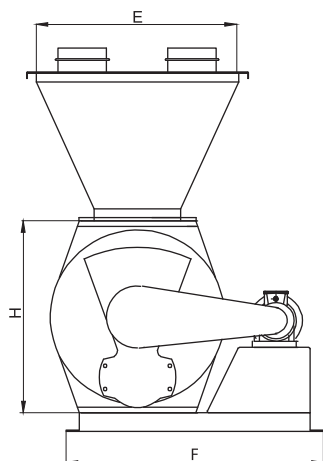Шлюзовый Затвор Бловера




Type	Technical Features			Dimensions (mm)										
	Capacity (m³/h)	Motor (kW)	Shaft Dia (Ø)	A	B	C	D	E	F	H	a1	a2	a3	a4
ECO-BHK 200	0,37	4	28	350	700	275	540	370	230	330	57	110	160	80
ECO-BHK 250	0,55	10	28	450	750	375	600	400	260	380	70	135	166	100
ECO-BHK 320	0,55	22,7	42	700	900	550	700	450	750	445	100	160	210	132
ECO-BHK 450	0,75	51	42	800	1000	590	880	550	810	570	120	195	245	150
ECO-BHK 500	1,5	91	55	900	1275	640	1000	700	890	666	175	233	267	267

Maximum capacity has been calculated according to 65% occupancy rate



HAVA KİLİDİ

Air Lock
Воздушный Затвор

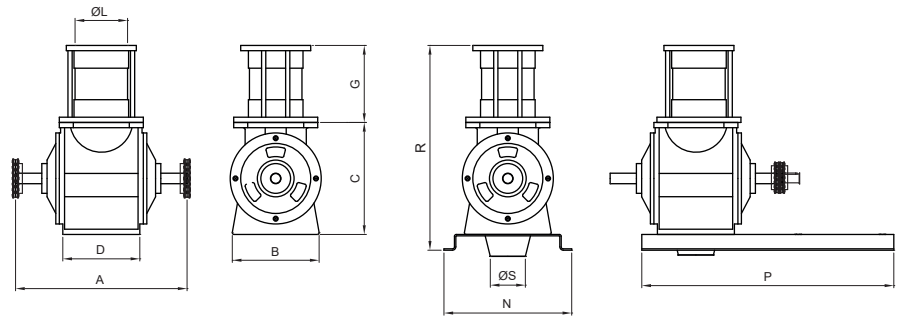


Model Type	Ölçüler / Dimensions (mm)										Ağırlık Weight (kg)
	A	B	C	D	G	L	N	P	R	S	
ECO-HK 200	490	250	295	220	220	132	365	720	515	120	40
ECO-HK 220	490	250	320	220	220	150	365	720	540	120	55
ECO-HK 240	490	250	320	220	220	150	365	720	540	120	65
ECO-HK 300	515	275	342	245	220	180	390	445	565	120	80
ECO-HK 400	590	390	480	340	220	200	440	485	700	200	135



PAÇAL MAKİNESİ

Blending Machine
Дозатор

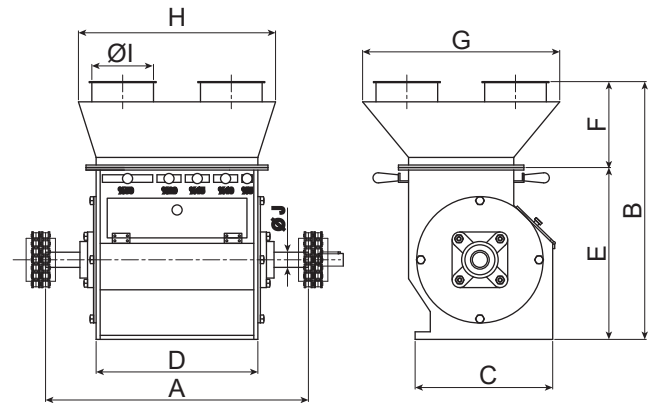

Model Type	Ölçüler / Dimensions (mm)										Kapasite Capacity (t/h)	Ağırlık Weight (kg)
	A	B	C	D	E	F	G	H	I	J		
GPC 220	520	510	270	320	340	170	390	390	120	30	8-10	45

ECO-HK-101 Zincir Kaplin (Takım)

Chain Coupling (Set)
Цепная Муфта (Комплект)



Code	Type	1/2"	5/8"	3/4"	1"
ECO-HK-101	4020	x	-	-	-
	5018	-	x	-	-
	5020	-	x	-	-
	6020	-	-	x	-
	6022	-	-	x	-
	8020	-	-	-	x

ECO-HK-102 Zincir Kaplin


Chain Coupling
Цепная Муфта



Code	Type
ECO-HK-102	3/8"
	1/2"
	5/8"
	3/4"
	1"

ECO-HK-103 Yıldız Kaplin

Star Coupling
Звздообразная Муфта



Code	Type	ØA	ØB	H
ECO-HK-103	90	80	51	93
	110	95	60	106
	130	110	72	116
	150	125	80	118
	180	140	93	131
	200	160	107	136

ECO-HK-105 Elastik Dişli Kaplin

Elastic Gear Coupling
Муфта



Code	Type
ECO-HK-105	DK 14
	DK 24
	DK 28
	DK 32
	DK 38
Code	Type
ECO-HK-105	DK 42
	DK 48
	DK 55
	DK 60

ECO-HK-104 Yıldız Kaplin Lastiği

Star Coupling Plastic
Резина Звздообразной Муфты



Code	Type
ECO-HK-104	90
	110
	130
	150
	180
	200

ECO-HK-106 Zincir - Kilit - Yarım Ek

Chain - Lock - Semi Supplement
Цепь-Замок-Дополнительный Замок







Code	Type	Pitch	Chain	Lock	Half Join
ECO-HK-106	Z / 01	3/8"	I-II-III	I-II-III	I-II-III
	Z / 02	1/2"	I-II-III	I-II-III	I-II-III
	Z / 03	5/8"	I-II-III	I-II-III	I-II-III
	Z / 04	3/4"	I-II-III	I-II-III	I-II-III
	Z / 05	1"	I-II-III	I-II-III	I-II-III
	Z / 06	1x1/4"	I-II-III	I-II-III	I-II-III
	Z / 07	1x1/2"	I-II-III	I-II-III	I-II-III
	Z / 08	1x3/4"	I-II-III	I-II-III	I-II-III
	Z / 09	2"	I-II-III	I-II-III	I-II-III
	Z / 10	2x1/2"	I-II-III	I-II-III	I-II-III



DÜŞÜK BASINÇLI FAN (TOZ ASPIRATÖR)


Low Pressure Fan (Dust Aspirator)

Вентилятор

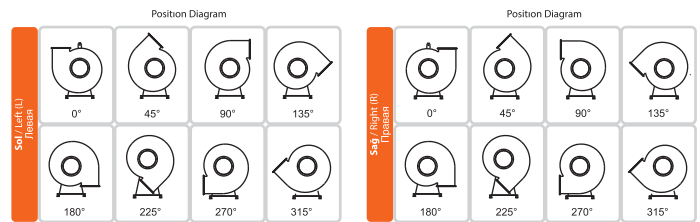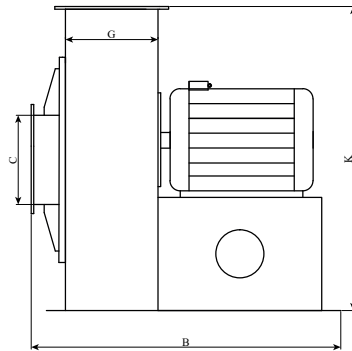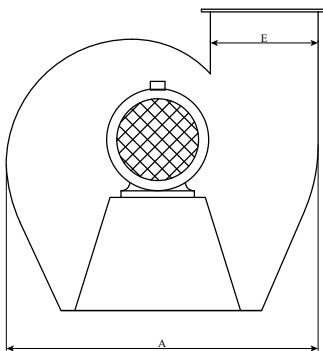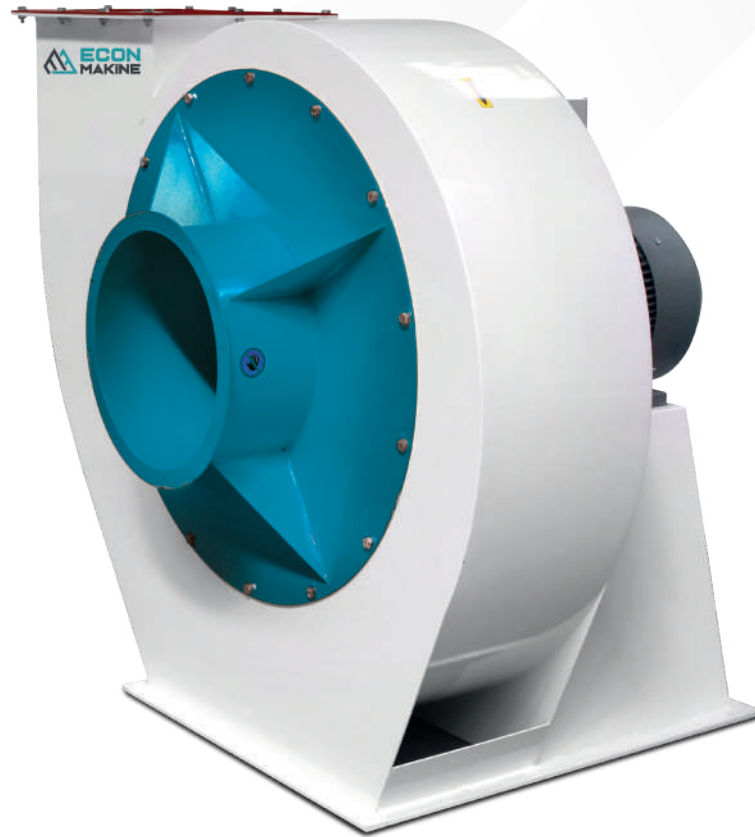

TYPE	C	K	E	G	A	B	Power (kW)	RPM
ECO-AT 5,5	350	820	350	300	896	790	5.5	1500
ECO-AT 7,5	360	1142	426	400	1224	910	7.5	1500
ECO-AT 11	425	1203	476	450	1326	1060	11	1500
ECO-AT 15	475	1268	530	500	1432	1110	15	1500
ECO-AT 18,5	420	1215	424	400	1332	1010	18.5	1500
ECO-AT 22	450	1550	524	400	1440	1010	22	1500

TOZ SİKLONU
Dust Cyclone
Циклон Пыли

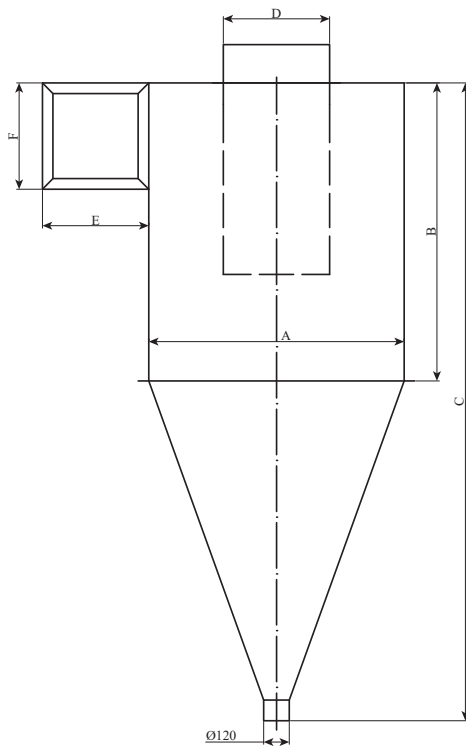

TYPE	ECO-TS 80	ECO-TS 100	ECO-TS 120	ECO-TS 135	ECO-TS150
A	800	1000	1200	1350	1500
B	1250	1300	1400	1450	1500
C	2050	2200	2700	2950	3150
D	250	300	500	550	600
E	250	300	400	450	500
F	250	300	400	450	500
AIR (m ³ / min)	1.2	1.8	2.4	3.3	4.1